



EIS1141 Inlet C14 single fused with switch

Specification Inlet




Power Rating	10A 250V AC
Electric Strength	AC 2.000V for 1 minute
Contact Resistance	30MΩ max.
Insulation Resistance	100MΩ min. at 500V DC
Operating Temperature	+90°C
Materials	Thermoplastic UL Flammability 94V-0 & Copper Alloy
Mounting	F: Flange; S: Snap In
Termination	Solder Tab (35: 3.5mm; 48: 4.8mm)
Panel Thickness	Snap In; 0.8mm; 1.0mm; 1.2mm; 1.5mm (customized thickness possible)


Specification Rocker Switch

Power Rating	10A 250V AC
Electric Strength	AC 1.500V for 1 minute
Contact Resistance	20MΩ max.
Insulation Resistance	100MΩ min. at 500V DC
Operating Temperature	+105°C
Materials	Thermoplastic UL Flammability 94V-2 & Copper Alloy
Mounting	F: Flange; S: Snap In
Termination	Solder Tab (35: 3.5mm; 48: 4.8mm)

Product Dimensions

All dimensions in mm



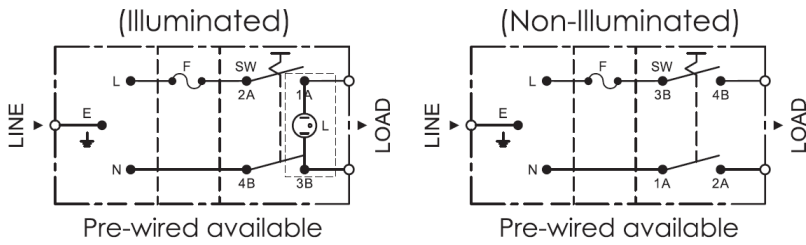


Ordering Information



Switch configuration	Panel Thickness ¹
Switch type	00: Flange
Number of poles	08: 0.8 mm
Colour	10: 1.0 mm
Print	12: 1.2 mm
LED colour	14: 1.4 mm
LED voltage	15: 1.5 mm
	20: 2.0 mm

Mounting
 F: Flange
 S: Snap In
 V: Vertical Flange²

Terminations
 35: 3.5mm solder
 48: 4.8mm solder

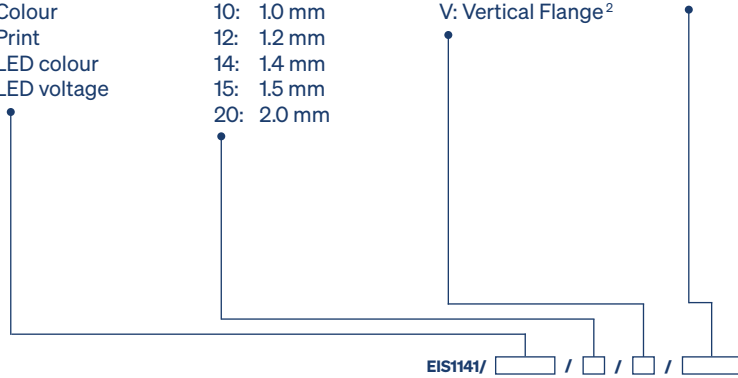

¹ Customized thickness possible

² Without UL