Female panel connector

Product figure (rear fastened)

Scale diagram

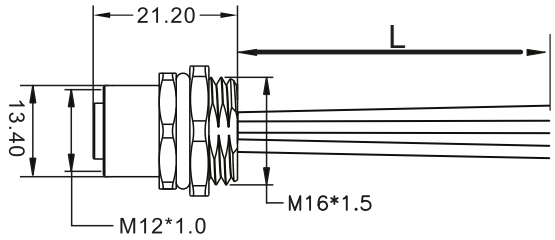

Contact layout (Front view)

4pins

T

Order Data

Contacts	Coding	Order No
4pins	T	M12T04/FF2/BN/FL

Specifications

Number of contacts	4
Termination	solder
Wire gauge	max. 1.5mm^2(max.16 AWG)
Operating temperature	-40°C~+80°C
Mechanical operation	> 100 mating cycles
Rated voltage	63V
Rated current (40℃)	12A
Protection degree	IP67/IP68
Contact resistance	≤3mΩ
Insulation resistance	≥100MΩ
Pin contact	CuZn
Socket contact	CuSn
Contact plating	Au