Male panel connector (T-coded)

Product figure (rear fastened)

Scale diagram

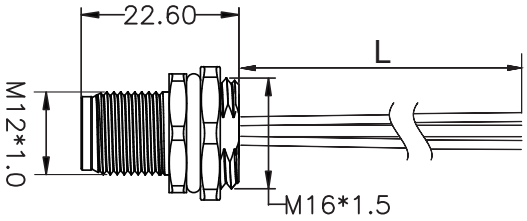

Contact layout (Front view)

4pins

T

Circuit diagram



Order No

Cable length	Contacts	Wire diameter	PVC	TPE
0.1M	4pins	1.5mm²	M12T04/MF2/BN/FL/04/0100	M12T04/MF2/BN/FL/14/0100
0.2M	4pins	1.5mm²	M12T04/MF2/BN/FL/04/0200	M12T04/MF2/BN/FL/14/0200
0.5M	4pins	1.5mm²	M12T04/MF2/BN/FL/04/0500	M12T04/MF2/BN/FL/14/0500
1.0M	4pins	1.5mm²	M12T04/MF2/BN/FL/04/1000	M12T04/MF2/BN/FL/14/1000

Specifications

Number of contacts	4
Rated voltage	63V
Rated current (40℃)	12A
Protection degree	IP67/IP68
Operating temperature	-25°C~+80°C