


Female cable

Product figure



Scale diagram

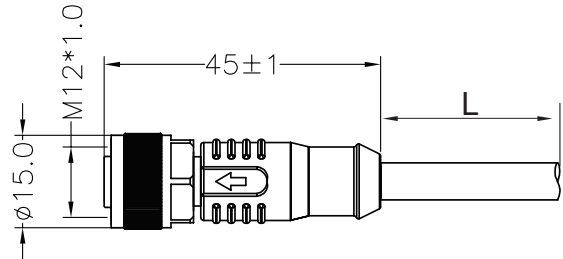

Contact layout (Front view)

4+FE

L



Order Data

Contacts	Coding	Order No
4+FE	L	M12L4F/FA3/BN/OE

Specifications

Number of contacts	4+FE
Termination	moulded on cable
Wire gauge	max. 1.5mm ² (max.16 AWG)
Operating temperature	-40°C~+85°C
Mechanical operation	> 100 mating cycles
Rated voltage	63V
Rated current (40°C)	16A
Protection degree	IP67/IP68
Contact resistance	≤3mΩ
Insulation resistance	≥100MΩ
Pin contact	CuZn
Socket contact	CuSn
Contact plating	Au

