



CM15 16mm Vandalproof Pushbutton

16mm	18mm	35.7mm	IP67	
------	------	--------	------	--


Specification

Termination	1.8x0.4mm fast connect terminals
Switching function	Momentary or maintained
Configuration of poles	Single or double
Maximum load	3A, 48VAC
LED voltage	See ordering information
Contact resistance	< 50mΩ
Insulation resistance	> 1000MΩ
Operating temperature	-20°C to +55°C
Ingress protection	IP67 (EN 60529)
Duty cycle	50,000 (min)
Operating force	4N
Nut mounting torque	~ 0.6Nm
Panel thickness	1.0mm to 10.0mm
Body & button material	See ordering information
Contact material	Silver Alloy


Product Dimensions

All dimensions in mm


Flat




Raised




Front View (all versions)




Circuit Diagram



Mounting Dimensions



Contact Arrangement



Ordering Information



Material

V2: Stainless steel¹
 AS: Black aluminium

Button


F: Flat
 R: Raised

Switch Function

M: Momentary
 L: Maintained

Poles

S: Single
 D: Double

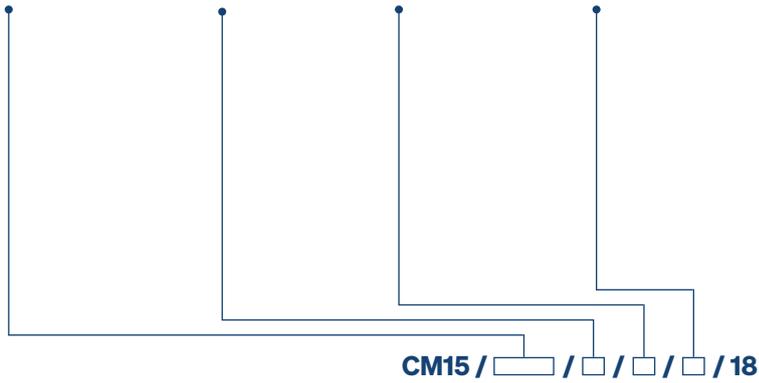

¹ 14301