CM15 16mm Vandalproof Pushbutton

16mm | 18mm | 36.6mm | 36.8mm | IP65

Specification

Termination	2.8×0.5mm solder terminals
Switching function	Momentary or maintained
Configuration of poles	Single or double
Maximum load	5A, 48VAC
LED voltage	-
Contact resistance	< 50mΩ
Insulation resistance	> 1000MΩ
Operating temperature	-25°C to +55°C
Ingress protection	IP65 (EN 60529)
Duty cycle	50,000 (min)
Operating force	1.5 ~ 2N
Nut mounting torque	~ 0.6Nm
Panel thickness	1.0mm to 8.0mm
Body & button material	See ordering information
Contact material	Silver Alloy

Product Dimensions

All dimensions in mm

Flat

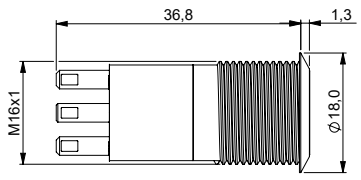

Raised

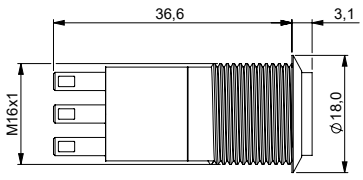

Front View (all versions)



ENGELKING

Circuit Diagram

Form C

Mounting Dimensions



Contact Arrangement



Ordering Information

Material
V2: Stainless steel[1]
BC: Chrome plated brass
AS: Black aluminium

Button
F: Flat
R: Raised

Switch Function
M: Momentary
L: Maintained

Poles
S: Single
D: Double

CM15 / □ / □ / □ / □ / 28

[1] 1.4301

Tel: +49 (0)7464 9865 0 Email: info@engelking.de www.engelking.de

ENGELKING