CM57 16mm Vandalproof Pushbutton

16mm | 18.5mm | 19.7mm | 25.6mm | IP67 | 19.8mm

Specification

Termination	50cm flying leads, PC pins or 2.0×0.5mm solder terminals
Switching function	Momentary or maintained
Configuration of poles	Single
Maximum load	250mA, 48VDC
LED voltage	-
Contact resistance	< 50mΩ
Insulation resistance	> 1000MΩ
Operating temperature	-40°C to +85°C
Ingress protection	IP67
Duty cycle	50,000 (min)
Operating force	3N
Nut mounting torque	~ 1.0Nm
Panel thickness	0.5mm to 6.0mm
Body & button material	See ordering information
Contact material	Gold

Product Dimensions

All dimensions in mm

Flying Leads

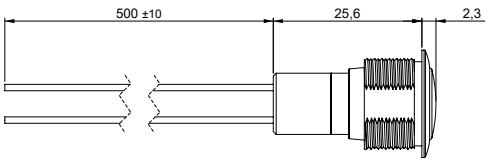

2.8mm Terminals



PC pins



ENGELKING

Circuit Diagram

Form A

Mounting Dimensions



Ordering Information

Material
V2: Stainless steel[1]
ZA: Zinc Alloy, Velour Chrome Plated
ZK: Zinc Alloy, Black

Switch Function
M: Momentary
L: Maintained

Terminations
20: 2.0mm solder tabs
L4: 50cm leads
PC: PC pins

CM57 / □ / D / □ / S / □

[1] 1.4301

Tel: +49 (0)7464 9865 0 Email: info@engelking.de www.engelking.de

ENGELKING