


## Female panel connector

Product figure (rear fastened PG9, long shell solder)

Scale diagram

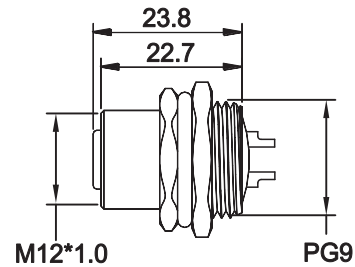

Contact layout (Front view)

3pins

4pins

5pins

8pins

12pins

17pins

5pins

4pins

A

A

A




A

A

A

B

D



## Order Data

Contacts	Coding	Order No
2pins	A	M12A02/FR3/BN/SC
3pins	A	M12A03/FR3/BN/SC
4pins	A	M12A04/FR3/BN/SC
	D	M12D04/FR3/BN/SC
5pins	A	M12A05/FR3/BN/SC
	B	M12B05/FR3/BN/SC
8pins	A	M12A08/FR3/BN/SC
12pins	A	M12A12/FR3/BN/SC
17pins	A	M12A17/FR3/BN/SC

## Specifications

Number of contacts	3	4	5	8	12	17
Termination	solder					
Wire gauge	0.14/0.25/0.34/0.5mm <sup>2</sup> / (26/24/22/20 AWG)					
Operating temperature	-25°C ~ +80°C					
Mechanical operation	> 100 mating cycles					
Rated voltage	250V		60V		30V	
Rated current (40°C)	4A			2A		1.5A
Protection degree	IP67/IP68					
Contact resistance	< 10mΩ					
Insulation resistance	≥ 100MΩ					
Pin contact	CuZn					
Socket contact	CuSn					
Contact plating	Au					