Male panel connector (S-coded)

Product figure (rear fastened)

Scale diagram

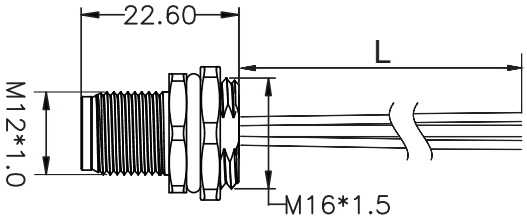

Contact layout (Front view)

3pins

S

4pins

S

Circuit diagram





Order No

Cable length	Contacts	Wire diameter	PVC	TPE
0.1M	3pins	1.5mm²	M12S03/MF2/BN/FL/04/01	M12S03/MF2/BN/FL/14/01
	4pins	1.5mm²	M12S04/MF2/BN/FL/04/01	M12S04/MF2/BN/FL/14/01
0.2M	3pins	1.5mm²	M12S03/MF2/BN/FL/04/02	M12S03/MF2/BN/FL/14/02
	4pins	1.5mm²	M12S04/MF2/BN/FL/04/02	M12S04/MF2/BN/FL/14/02
0.5M	3pins	1.5mm²	M12S03/MF2/BN/FL/04/05	M12S03/MF2/BN/FL/14/05
	4pins	1.5mm²	M12S04/MF2/BN/FL/04/05	M12S04/MF2/BN/FL/14/05
1.0M	3pins	1.5mm²	M12S03/MF2/BN/FL/04/10	M12S03/MF2/BN/FL/14/10
	4pins	1.5mm²	M12S04/MF2/BN/FL/04/10	M12S04/MF2/BN/FL/14/10

Specifications

Number of contacts	3	4
Rated voltage	630V	
Rated current (40℃)	16A	12A
Protection degree	IP67/IP68	
Operating temperature	-25°C~+80°C	

Lorem ipsum