



# EIS1142 Inlet C14 double fused with switch

## Specification Inlet




Power Rating	10A 250V AC
Electric Strength	AC 2.000V for 1 minute
Contact Resistance	30MΩ max.
Insulation Resistance	100MΩ min. at 500V DC
Operating Temperature	+90°C
Materials	Thermoplastic UL Flammability 94V-0 & Copper Alloy
Mounting	F: Flange; S: Snap In
Termination	Solder Tab (35: 3.5mm; 48: 4.8mm)
Panel Thickness	Snap In: 1.0mm; 1.2mm; 1.5mm (customized thickness possible)




## Specification Rocker Switch

Power Rating	10A 250V AC
Electric Strength	AC 1.500V for 1 minute
Contact Resistance	20MΩ max.
Insulation Resistance	100MΩ min. at 500V DC
Operating Temperature	+65°C (North America); +90°C (Europe)
Materials	Thermoplastic UL Flammability 94V-2 & Copper Alloy
Mounting	F: Flange; S: Snap In
Termination	Solder Tab (35: 3.5mm; 48: 4.8mm)


## Product Dimensions

All dimensions in mm

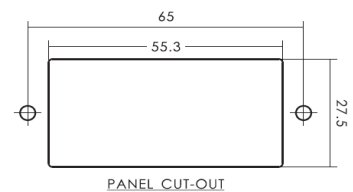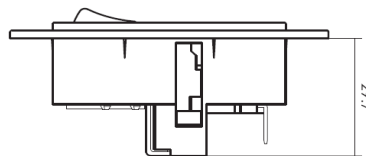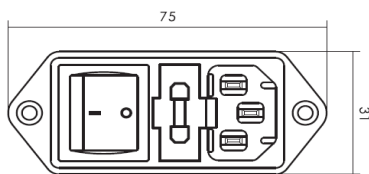



PANEL CUT-OUT

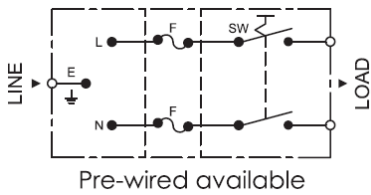


## Ordering Information



Switch configuration	Panel Thickness <sup>1</sup>
Switch type	00: Flange
Number of poles	08: 0.8 mm
Colour	10: 1.0 mm
Print	12: 1.2 mm
LED colour	14: 1.4 mm
LED voltage	15: 1.5 mm
	20: 2.0 mm

Mounting
F: Flange
S: Snap In
V: Vertical Flange <sup>2</sup>

Terminations
35: 3.5mm solder
48: 4.8mm solder

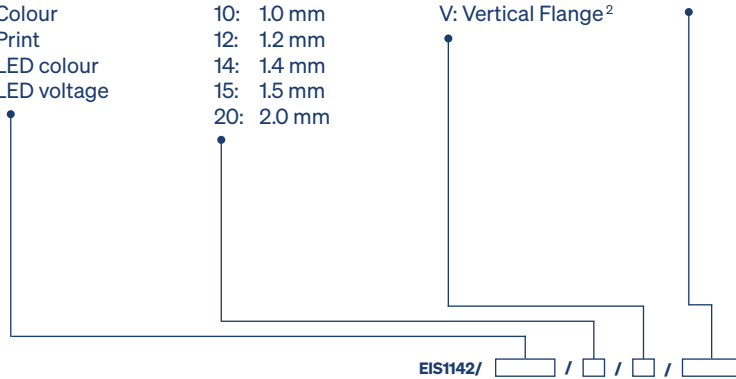

<sup>1</sup> Customized thickness possible

<sup>2</sup> Without UL