


Male cable (T-coded)

Product figure



Scale diagram

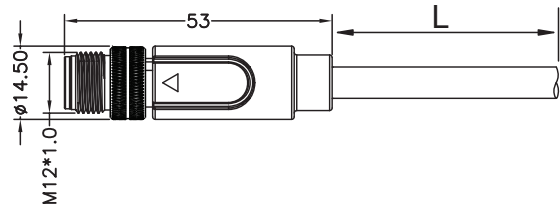


Contact layout (Front view)

4pins

T



Circuit diagram



Order No

Cable length	Contacts	Wire diameter	PVC		PUR	
			black	gray	black	gray
1.5M	4pins	1.5mm ²	M12T04/MA3/BN/OE/04/1500	M12T04/MA3/BN/OE/09/1500	M12T04/MA3/BN/OE/24/1500	M12T04/MA3/BN/OE/29/1500
3.0M	4pins	1.5mm ²	M12T04/MA3/BN/OE/04/3000	M12T04/MA3/BN/OE/09/3000	M12T04/MA3/BN/OE/24/3000	M12T04/MA3/BN/OE/29/3000
5.0M	4pins	1.5mm ²	M12T04/MA3/BN/OE/04/5000	M12T04/MA3/BN/OE/09/5000	M12T04/MA3/BN/OE/24/5000	M12T04/MA3/BN/OE/29/5000
7.5M	4pins	1.5mm ²	M12T04/MA3/BN/OE/04/7500	M12T04/MA3/BN/OE/09/7500	M12T04/MA3/BN/OE/24/7500	M12T04/MA3/BN/OE/29/7500
10M	4pins	1.5mm ²	M12T04/MA3/BN/OE/04/10M0	M12T04/MA3/BN/OE/09/10M0	M12T04/MA3/BN/OE/24/10M0	M12T04/MA3/BN/OE/29/10M0

Specifications

Number of contacts	4
Rated voltage	63V
Rated current (40°C)	12A
Protection degree	IP67/IP68
Operating temperature	-40°C ~ +80°C
Cable OD	8.0mm