

8600 Rocker Switches - Miniature 10A 250Vac Single & Double Pole

rocker switches



- ▶ Miniature rocker switch
- ▶ Ratings up to 16A, 250Vac
- ▶ Single & double pole
- ▶ ON/OFF, C/O, biased and centre off switching
- ▶ Push on, solder and PCB terminals
- ▶ Illuminated and non-illuminated
- ▶ Matching indicators
- ▶ Panel cut out
single: 19.3 x 12.9
double: 19.3 x 21.9



10(4)A 250Vac T90 (unless noted below)



UL CSA See ratings below
UL 65°C, file E45221, CSA file LR10990

In house test


Inrush 50A to EN61058-1 & 10A 24Vdc



RoHS compliant

3mm contact gap except where marked μ .
Technical data on pages 4 & 5 (switches), 6 (indicators).

ARS 8600 V B 00 N B B H 000

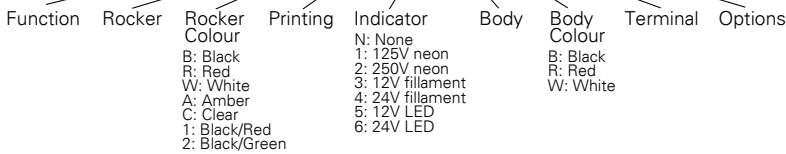

TERMINAL	FUNCTION		ROCKER
H 4.8 x 0.8	Approvals & ratings vary with function	ON OFF Switches are ON when pressed over terminal 3 	V Curved
T 3.5 x 0.8 Solder	8600 10(4)A 16A 250V, 10A 277V 1/2HP 277V, 1/4HP 125V 	8650 10(4)A 10A 277V 1/2HP 277V, 1/4HP 125V 	V Curved (lit)
X PCB 0.8 Sq	8601 6(1)A 16A 250V, 6A 277V 	8651 6(1)A 6A 277V 	D Paddle lever (Single pole non-lit only)
	8602 10A 16A 250V, 10A 277V 	8652 10(4)A 6A 277V 	H Slotted for actuator (8600 and 8610 only)
	N/A	8653 10(4)A 6A 277V 	F Flat Indicator only (Single pole)
	8610 6(1)A 10A 277V 1/2HP 277V, 1/4HP 125V 	8660 6(1)A 10A 277V, 1/2HP 277V 1/2HP 277V, 1/4HP 125V 	
	8611 6A 277V 	8661 6A 277V 	
	8620 μ See page 16	8670 μ See page 16	
Double Pole switches with "X" terminals are supplied without terminal barriers	8630 		



ARS8600VB13NBBH00



ARS8600VB00NBBH00



ARS8630FA002BH000



ARS8650VB13NBBH000



ARS8660VB00NBBH000




ARS8653VA002BBH000


BODY

B Single pole

Panel cut-out



Bezel




Single Pole dimensions for snap-in fixing

Panel thickness	Dimension X
0.75-1.24	19.1/19.2
1.25-1.99	19.3/19.4
2.00-3.00	19.7/19.8


B (Double Pole) with terminal barrier

C (Double Pole) w/o terminal barrier

Panel cut-out



Bezel



Double Pole dimensions for snap-in fixing

Panel thickness	Dimension X
0.75-1.24	19.1/19.2
1.25-1.99	19.3/19.4
2.00-3.00	19.7/19.8

Cut-outs must be punched in the direction of insertion

OPTIONS

Finish

Matt finish only.

Colour

Call sales for custom colours.
A full range is available for large orders.

Legend printing

Select from the examples or call sales for custom legend.

Lamp voltage

Call sales for details of available voltages.

Blanking plate A8634FB

Dummy unit to fill unused panel holes.
Single pole size only.

Protective covers (Code: CVR)

L167 for SP

L180 for DP

(designed to IP65)

Snap on to bodies with V rocker or F lens, this reduces maximum acceptable panel thickness to 2.2mm.




Single Pole options

Most switches shown can have single pole switching in double pole bodies.


DIMENSIONS (mm)

Single pole



Terminals shown are "H" 4.8 push on type


Double pole




Terminal spacing 10.2 between pole centres

For 8620 and 8670 dimensions see page 16


Examples of printing (code)



CL076
(13)



CL080
(14)



CL141
(15)



CL142
(16)



CL059
(17)



CL058
(18)