

# 8800 Thinline Rocker Switches 10A 250Vac



ARS8800VB12NABH000

- ▶ Ultra thin rocker switch
- ▶ Ratings up to 15A, 250Vac
- ▶ Single and twin gang
- ▶ Panel cut out:  
Single 17.4 x 6.8  
Twin 17.4 x 13.4



10(6)A 250Vac T100  
6(2)A 250Vac T100 5E4 (50,000 Operations)  
Inrush 50A to EN60065:1998




UL CSA 15A 250Vac (Twin unit is 10A 250Vac)  
UL CSA 125Vac 1/2hp  
UL 100°C, file E45221, CSA file LR10990



RoHS compliant

3mm contact gap.  
Technical data on pages 4 & 5.

Single: **ARS 8800 V B 00 N A B H 000**

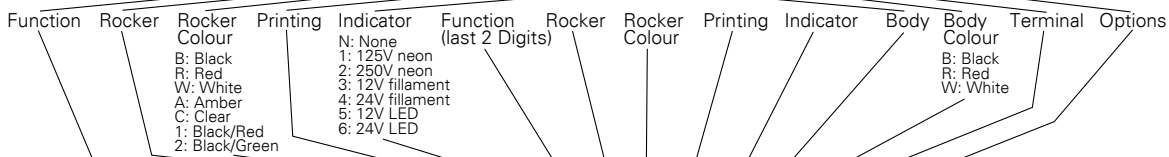

Twin: **ART 8800 V B 00 N 00 V B 00 N A B H 000**

TERMINAL	FUNCTION		ROCKER
<b>H</b>  4.8 x 0.8		 Switches are ON when pressed over terminal 1	<b>V</b> Curved  
	<b>8800</b>	 ON - OFF Single pole	
<b>T</b>  3.5 x 0.8 Solder		 Switches are ON when pressed over terminals 1 or 3	
	<b>8800/8800</b>	 ON - OFF Twin (Single pole)	
<b>X</b>  0.8Sq Solder *			
*Available for single switch only, not twin			



**BODY**

**A Single pole**

Panel cut-out      Bezel

\*Optional profile for orientation

**A Single pole - Twin**

Panel cut-out      Bezel

\*Optional profile for orientation

Panel thickness	Dim X
0.75-1.24	19.1/19.2
1.25-1.99	19.3/19.4
2.00-3.00	19.7/19.8

**OPTIONS**


**Finish**  
Matt finish only.

**Colour**  
Call sales for custom colours.  
A full range is available for large orders.


**Legend printing**  
Select from the examples or call sales for custom legends.

**Dimensions (mm)**

**A body (H terminals shown)**

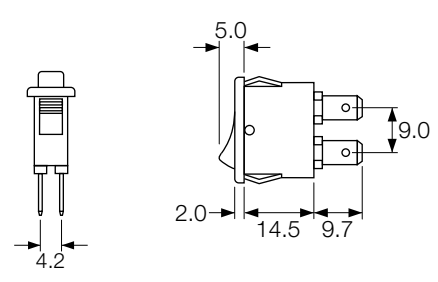

**A twin body (H terminals shown)**

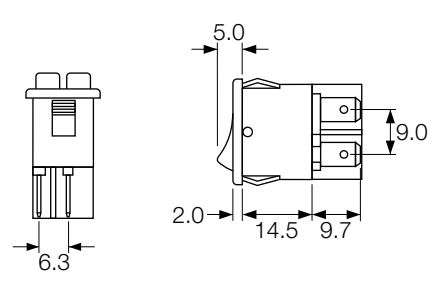

**Examples of printing (code)**



Cut-outs must be punched in the direction of insertion