


**BASIC DIMENSIONS**

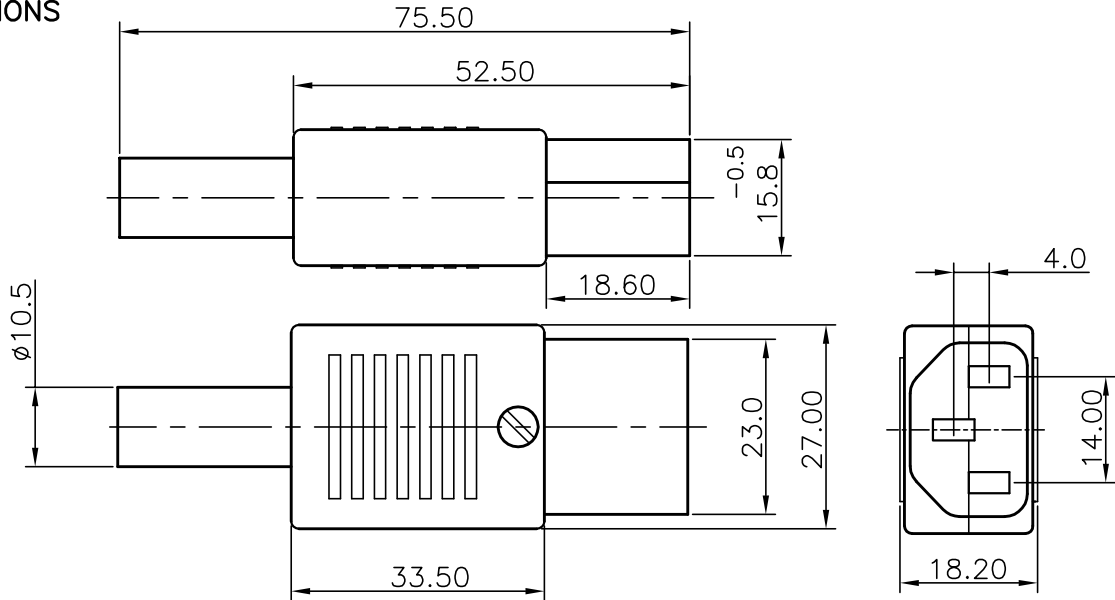


**SPECIFICATION TABLE**

SR.NO.	PARAMETER	SPECIFICATION	
1	Type	Rewirable Connector	
2	V/A Rating	10A 250VAC (VDE), 15A 250VAC (UL, C,US)	
3	Contact resistance (Initial)	10 mohms max.	
4	Insulation resistance at 500 V DC	100 Mohms min.	
5	H.V.Break down test (For 1minute)	2 KV AC	
6	Mounting	---	
7	Terminals	Pillar-type(Wire-Insertion)	
8	Permissible temp.	(a) With/Without load	0°C To +70°C
		(b) For Soldering	---
9	Material	(a) Body, Cable Lock flame retardant	Nylon-6, 20%GF V2
		(b) Cable Guide	PVC
		(c) Contacts, Terminals	Brass, Nickel plating
		(d) Terminal Screws	M.S.,Zinc Plating
10	Reference standards	IEC 60320-1, UL-498, CSA:22.2 No.182.3	

**ORDERING CODE**

SR.NO.	TYPE	V/A Rating	CODE	APPROVALS
1	Rewirable connector with flame retardant body material	10A, 250VAC with Sleeve	EMO-40-V2	VDE, CE RoHS Complied
		15A, 250VAC without sleeve	EMO-40-EV2	UL(C,US) RoHS Complied

PRODUCT : <b>Rewirable Connector</b>						CODE : <b>EMO-40-X (Series)</b>		
APP		28.07.07		SBP		 ELCOM HOUSE M.B.LOHIA MARG 413/1/1-A, GANDHINAGAR KOLHAPUR-416 119 <b>Elcom International Pvt. Ltd.</b>		
CHK		28.07.07		GJG				
DRN		28.07.07		TRN				
R1	Redrawn	27.01.11		PBM				
REV	IS	WAS	DATE	SIGN	APP.	BY	DATE	SIGN
UNSP.TOLERANCE			DIMNS. IN	WT(Gm)	SCALE:-	PROJECTION	SHEET	DRAWING NUMBER
OVER	-	1	10	mm	Max.	NTS.	1 OF 1	<b>P E M O 2 4 0 V</b>
UP TO	1	10	-	Moulding, plating details as per Bill of Material				REVISION
±	0.2	0.3	0.5	Unspecified colour is Black, GF:Glass filled.				<b>R1</b>